
| | | | |
|---|---|---|---|
| AH40.10-P-0001-01A | TIREFIT tire sealant | MODEL 163, 168, 169, 170, 171, 199, 203, 209, 211,215, 219, 230, 240, 414, 639 | i |

**Note**
TIREFIT tire sealant has a shelf life of 3 or 4 years depending on the version, measured from the date of manufacture marked on the container. The TIREFIT tire sealant must be replaced after this date.

**Application**
TIREFIT tire sealant can be used at the roadside to seal minor punctures, in particular in the tread. After this the tire will be finitely operational.

- F Tires which have been treated with TIREFIT tire sealant must not be repaired. The should be replaced with new tires of the same type and specifications from the same manufacturer.
- F To prevent odor emission by TIREFIT tire sealant, deflate tire outdoors.

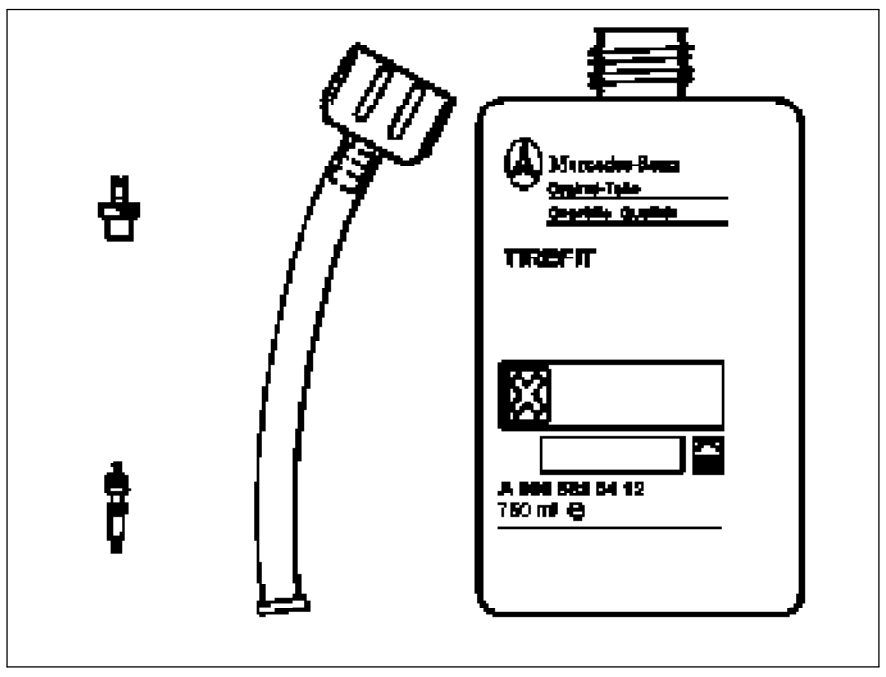


P40.10-0311-01

- F The TIREFIT tire sealant must not come into contact with skin, eyes or clothing. If tire sealant comes into contact with skin, eyes or clothing, rinse immediately with clean water.
  Call a physician immediately if allergic reactions occur.
  Keep the TIREFIT tire sealant away from children. If TIREFIT tire sealant is swallowed, induce vomiting and call a physician immediately.

**Regulations for disposal**
Dispose of used or obsolete TIREFIT in a container designed for paint shop waste (see Workshop Equipment Manual Volume 2, Chapter U, Group 00 (22), Subject 2.3).
When using TIREFIT always avoid fire, open flames and smoking, avoid arcing, and avoid inhaling the fumes fro the product.